

A1100

Electronic Polyphase Meter



Advanced, Cost-effective Polyphase Metering...

Features

- Accuracy – Class 1 or Class 2
- kWh import or kWh import/export
- 3 phase, 4 wire or 3 phase, 3 wire
- 16 year product life
- Large figure display
- Extensive security data
- IrDA (Infrared Data Association) output for transmitting billing, security and status data
- 12 kV isolation
- Compact design
- Double insulated, glass filled polycarbonate case, generally to DIN 43857 part 2 and part 4 (except for top fixing centres)
- Ingress protection to IP53 in accordance with EN 60529 : 1991

Options

- Liquid Crystal Display or mechanical stepper register
- One or two rates controlled by an external device
- Auxiliary terminals configured for rate selection (two rate meters), pulsing output or serial data output
- Pulsed output (DIN EN 62053-31)
- Extended terminal cover with or without cut-out

The use of innovative metering technology provides cost-effective metering that is highly secure and maintains a high degree of accuracy over its full operating range. The A1100 meter is suitable for domestic, commercial and light industrial polyphase applications.


Two main versions of the A1100 meter are available. The liquid crystal display version of the meter can be supplied as a one or two rate meter. The meter is available as import only or import and export. The display has a customer defined display sequence that can include security information. Chevrons and legends on the nameplate identify the data being displayed.

The stepper register version of the meter is available for kWh import one rate applications only. Five LED's are used to identify the status of the meter.

Communications is provided via the IrDA port allowing the meter registers and security data to be read electronically using a hand-held device. This greatly reduces the possibility of manual meter reading errors. As an option the same absolute data as the IrDA port or a pulsed output can be transmitted via the meter's auxiliary terminals.

Meters can be supplied to meet accuracy Class 1 or Class 2 requirements. They are approved to EN 61036:1996 and have an ingress protection of IP53 to EN60529:1991.

Display

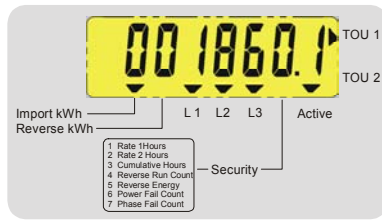


The LCD version of the A1100 displays register and security information by use of chevrons and digits. The mechanical register version has five LED's for reporting status information.

Meter nameplates can be printed in any language.

Security

The A1100 offers high security with many useful security features. The meter stores all registration and configuration data to non-volatile memory. All data is retained for the life of the meter.

Recordable security features are illustrated below.

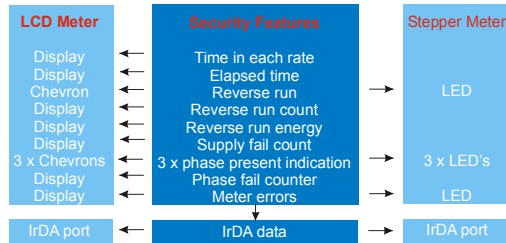

As an option the kWh register can increment in power flow insensitive mode i.e. it increments regardless of energy flow direction.

Pulse Output

An opto-isolated pulse output can provide the basis for an energy management system or AMR. These pulses are output via the meter's auxiliary terminals. The output conforms to DIN EN 62053-31.

System Connections

2 Element	3 phase 3 wire
3 Element	3 phase 4 wire 2 phases of a 3 phase 4 wire 2 phase 3 wire 1 phase 3 wire 1 phase 2 wire (LCD meter only)



Elster Metering Systems

Oulton Road, Stone,
Staffordshire,

ST15 0RS

Tel: 44 (0) 1785 812111

Fax: 44 (0) 1785 818804

www.elstermetering.com

IrDA Communications

The IrDA (Infrared Data Association) communications port provides one way communications, transmitting a continual data stream from the meter to an external device.



An error checking algorithm protects the integrity of the data.

As an option the same absolute data is available via the meter's auxiliary terminals. The port uses the OBIS: IEC 62056-61 data format.

Important information is provided:

Meter registers	Security features
Status information	Identification


The port transmits over a distance of 250mm.

Technical Data

Current range *	20-100A, 5-100A
Voltage Range *	210-240V, (L-N or L-L)
Frequency	50 Hz
Burden	
Voltage Circuits (230V)	9VA (capacitive burden)
Current Circuits	4VA @ 100A
Insulation	4kV RMS 50Hz
Impulse withstand	12kV 1.2/μs 500ohm source
Display LCD	9.8mm characters High contrast, wide angle
Stepper Motor	7mm characters
IrDA baud rates *	2400, 4800 or 9600
Serial baud rates *	2400 or 4800
Product life	16 years
Certified Product Life	15 years (OFGEM model)
Temperature	-25° to + 55° C (Operational range) -25° to + 85° C (Storage)
Humidity	Annual mean 75% (For 30 days spread over one year, 95%)
Pulse Width *	10 to 250ms or equal mark/space
Wh/pulse *	1, 2, 4, 5, 10, 20, 25, 40, 50, 100
Weight	860 grams
Specifications *	kWh Class 1 or 2 IEC 61036 : 1996
Case	IP 53 to EN 60529 : 1991

* Programmable manufacturing options

Dimensions and Fixing Centres

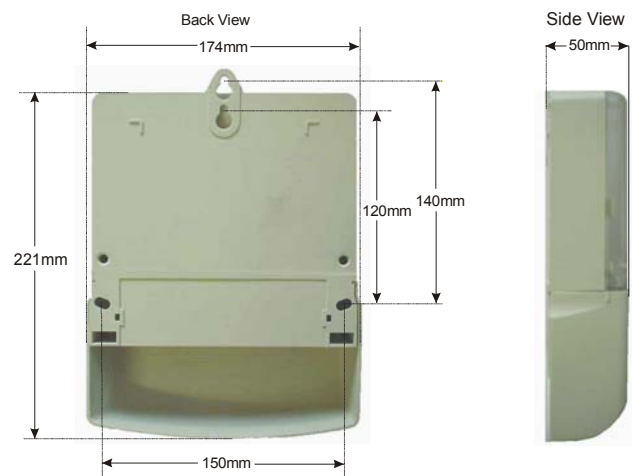

Our policy is one of continuous product development and the right is reserved to supply equipment which may vary slightly from that described.

DRAFT 16.7.2003